


SERAGE

QUALITY RELIABILITY VISION



8MP IP FIXED LENS DOME

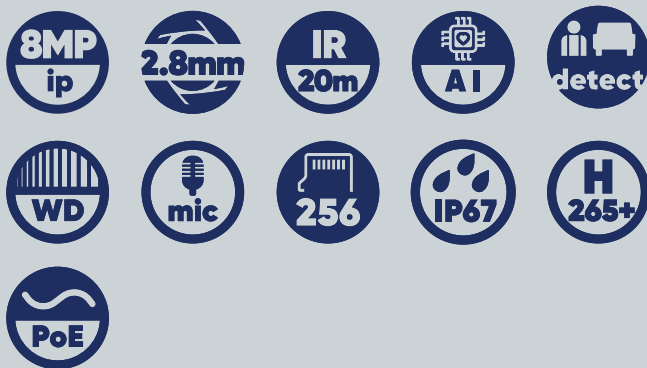

SRVDN8FAIW

| | |
|----------------------------------|---|
| Imaging Device | 1/2.7" |
| Effective Pixels | 8MP 3840(H)×2160(V) |
| Min. Illumination | Color 0.004lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON |
| Focal Length (Zoom Ratio) | 2.8mm |
| Max. Aperture Ratio | F No. 1.6 |
| IR Viewable Length | Up to 20m |
| Wide Dynamic Range | WDR |
| Digital Noise Reduction | 3D DNR |
| Motion Detection | Off/On (8 Level) |
| Day & Night | IR cut filter with auto switch (Day/Night/Auto/Image/Schedule) |
| Privacy Masking | Off/On (4 Zone, Rectangle) |
| White Balance | Auto/Manual |
| On-Board Storage | Micro SD slot, up to 256GB |
| Audio | Built-in microphone |
| Hardware Reset | Yes |
| Smart Feature | PID,LCD,PD/VD,SOD,CC,CD,QD, Heat MAP,RSD,LPD,FD (detection) |
| Video Compression Format | H.265/H.264 |
| Resolution | Mainstream@20fps 8MP(3840x2160), 5MP(2592x1944,3072x1728), 4MP(2592x1520),3MP(2304x1296), 1080P(1920x1080), 960P(1280*960), 720P(1280x720) Substream@20fps 720P(1280x720),VGA(640x480), QVGA(320x240) Mobilestream@20fps VGA(640x480), QVGA (320x240)) |
| Bitrate control method | CBR/VBR |
| Protocol | PD&VD, PID, LCD,CC,SOD,HM,CD,QD LPD,RSD |
| Application Programming | ONVIF (Profile S/G/T) |
| Web browser | IE10/11, Safari V12.1 above, Firefox V.52 above, Google chrome V.57 above Edge V.79 abover |
| Operating Conditions | -35~+55°C/less than ≤ 95% RH |
| Ingress Protection | IP67 |
| Input Voltage / Current | D12V/POE(IEEE802.3af) |
| Material | Metal |
| Weight | 556g |

KEY FEATURES



WHERE

Ideal for internal use, especially offices, retail stores and restaurants.

WHY

Anti-vandal with no moving parts, stopping people from changing the direction of the camera