


4-PORT PoE SWITCH

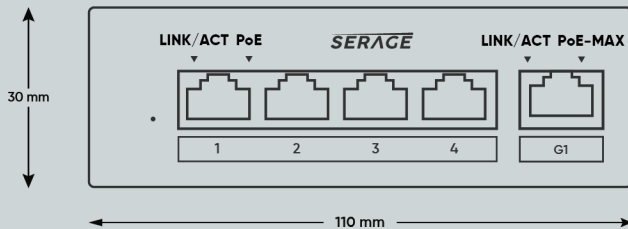

KEY FEATURES

Network Interfaces

Rj45,10/100 ,4*10/100M PoE+1*10/100M

Network Management

Lite Manage (CMS connection, PoE power consumer statistics, parameter configuration, log checking, firmware update, network topology)

IEEE Standard

802.3802.3x802.3u802.3az

Uplink Rate (Individual Port)

100M

Downlink Rate (Individual Port)

100M

PoE Port

1~4

Extension Mode (EPoE)

250 Meters

Max. Power (Individual Port)

30W

Max. Power (All Ports)

52W

Lightning Protection

4KV

NETWORK

Model	SRPOE4
Interfaces	Rj45,10/100 ,4*10/100M
Network Management	PoE+1*10/100M Lite Manage (CMS connection , PoE power consumer statistics, parameter configuration, log checking, firmware update, network topology)
IEEE Standard	802.3802.3x802.3u802.3az
Uplink Rate (Individual Port)	100M
Downlink Rate (Individual Port)	100M
Exchange capacity	1 Gbps
Packet Forwarding Rate	0.7 Mbps
Internal Cache	1Mbits

POE

PoE standard	IEEE 802.3at/af
PoE Port	1~4
Extension Mode (EPoE)	250 Meters
Max. Power (Individual Port)	30W
Max. Power (All Ports)	52W

GENERAL

Material	Metal
Weight	220g
Dimension (WxDxH)	110*82*30mm
Operating Temperature	0°C~+40°C
Operating Humidity	Less than 90%RH
Storage Temperature	-40°C~+85°C
Storage Humidity	Less than 90%RH
Power Specifications	48V/ 1.2A
Lightning Protection	4KV