

MAIN FEATURES



5MP



2560 (H) × 1920 (V)



2.8-12mm Vari-Focal Lens



40m IR Distance





Digital WDR



IP66



12v DC

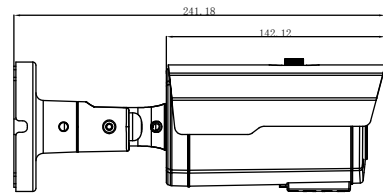

| MODEL | SRBT5VFW |
|----------------------------------|--|
| Image Sensor | 5 Megapixel, SC5035, 1/2.7" CMOS |
| Resolution | 2560(H) x 1920(V) |
| Viewing Angle (Degrees) | D: 137.04° (W) - 34.1° (T) H: 113.54° (W) - 29.76° (T) V: 59.3° (W) - 16.76° (T) |
| Video Frame Rate | 1080p 30FPS (NTSC) 1080p 25FPS (PAL) |
| Vari-Focal Lens Range (mm) | 2.8-12mm |
| F-Number | F1.6(W) - F3.3(T) ±5% |
| Cable Managed Stand (Yes/No) | Yes |
| AGC | 1~15 Optional |
| Video Output Termination | 1-Channel BNC video output |
| IR Cut Filter | YES, 850nm |
| Audio - Microphone (Yes/No) | NO |
| IR LED Qty | 24pcs SMD LED |
| Night Vision (Metres) | 40m |
| IR Cut Filter | Support |
| Backlight Compensation | N/A |
| Ingress Protection | IP66 |
| Operating Power (Volts and Amps) | MAX 12VX0.44A @5.28W |
| Operating Temperature | -30°~+55° |
| Dimension | 84mmx240mm(L) |

* Specifications subject to change without further notice

ACCESSORIES



SRJ3/W